


VERTICAL CENTRIFUGAL CASTING MACHINES

Heavy Duty Series for ferrous and non ferrous castings

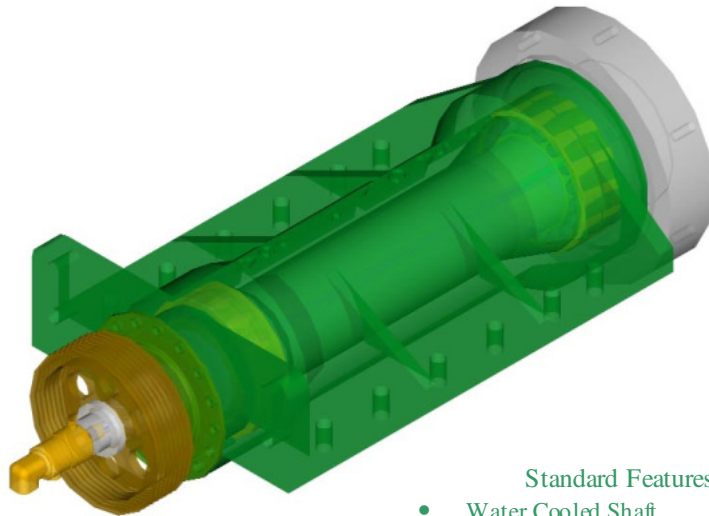

Standard Models

V10K Specifications

Max Table Dia: 84" (2134 mm)
Max Mold Height: 48" (1219 mm)
Balanced Load: 10,000# (4536 kgs)

V30K Specifications

Max Table Dia: 120" (3048 mm)
Max Mold Height: 60" (1524 mm)
Balanced Load: 30,000# (13608 kgs)

V50K Specifications

Max Table Dia: 144" (3658 mm)
Max Mold Height: 60" (1524 mm)
Balanced Load: 50,000# (22680 kgs)

V75K Specifications


Max Table Dia: 144" (3658 M)
Max Mold Height: 60" (1524 M)
Balanced Load: 75,000# (34024 kgs)

Standard Features

- Water Cooled Shaft
- Rotary Union
- Heavy Duty Bearings
- Rated Variable speed drive unit
- Operators Controls
- Mold Water Cooling Manifold
- Sample of Centrifugal Mold Wash

Optional Equipment

- Rated Extractor Tongs up to 10,000 lb (4536 kgs) capacity
- Bearing Temperature Monitor
- Vibration Monitor
- Infrared Temperature Monitor
- Digital Metal weighting scales
- Mold Adapter Tables
- Centrifugal Molds

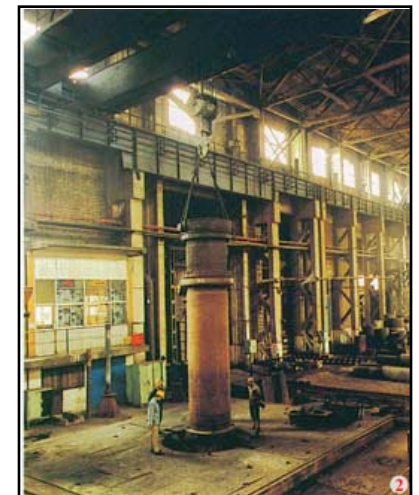

Typical Products: Pulverizer Rolls, Steel Mill Rolls, Ball Valve Balls, Forming Rolls, Bi-Metal Rolls

Tulsa Centrifugal Casting Machines LLC
P.O. Box 702751, Tulsa, OK 74170-2751
U.S.A.

Phone (918) 585-1400 Fax: (918) 779-6085
E-mail: sales@centrifugalcasting.com
Web: www.centrifugalcasting.com

Vertical Centrifugal Casting Machine

